


YÜKSEK
HIZLI
ASANSÖRLER
İÇİN

FOR
HIGH SPEED
ELEVATORS

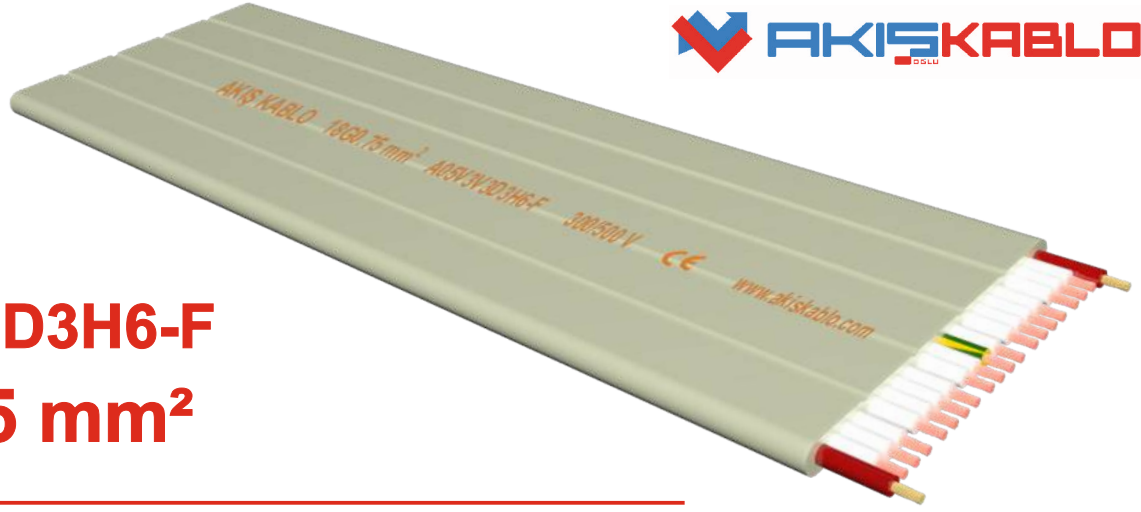

H05V3V3D3H6-F 18G0.75 mm²

ESNEK KABLO YAPISI / İNCELTİLMİŞ DIŞ ÇAP / KÜÇÜK BÜKÜLME YARIÇAP / ALEV GECİKTİRİCİ ÖZELLİK
FLEXIBLE CABLE DESIGN / REDUCED OUTER DIAMETER / SMALL BENDING RADIUS / FLAME RETARDANT CHARACTERISTIC



CONDUCTIVE	Sect'An	0.75 mm ²
	Standard	EN 60228 Class-5 Stranded Electrolyt'Ä Bare Copper
	Res'ıtance	<25.5 Ohm/km (20 °C)
CORE INSULATION	Construct'An	24 x 0,20 mm Electrolytic Bare Copper
	Mater'Al	TS EN 50363-3 T2 PVC
	Standard	TS EN 50363-3
	Elongat'An	> %170
	Tens'İle Strength	> 12 N/mm ²
	F'Al Performance Standard	TS EN 60332-1-2
	Mark'Ag	White On Black Number +Yellow / Green
	Work'Ag Temperature	TS EN 50363-3 T5 (-15 °C/ + 70 °C)
COVER INSULATION	UV Protect'An	AVAILABLE
	Mater'Al	TS EN 50363-4-1 TM2 PVC Ral 7035
	Standard	TS EN 50363-4-1 TM2 PVC Ral 7035
	Elongat'An	> %200
	Tens'İle Strength	> 12 N/mm ²
	F'Al Performance Standard	TS EN 60332-1-2
	Mark'Ag	Laser Print
	Work'Ag Temperature	TS EN 50363-4-1 TM2 (-30 °C/ + 70 °C)
ROPE	Color	RAL 7035 GREY / RAL 9005 BLACK
	UV Protect'An	AVAILABLE
ROPE	PVC Coated Steel Wire on Both S'İdes of The Cable	
TEST VOLTAGE	2000 V	
WORKING VOLTAGE	300/500 V	
ROPE	AVAILABLE	
FLEXIBILITY	40 X THICK	
MAX. FREE HANGER DISTANCE	100 M	
MAX. WORKING SPEED	5 m/s	
PACKING	500- 1000 M	
PRODUCT STANDARD	TS EN 50214:2010	
QUALTY CERTIFICATE	TS EN ISO 9001:2015 ,TSE, TSE HAR , CE, REACH, ROSH, Pb FREE	